


CH234026G

Electrical Characteristics

Material	Permeability (μ)	AL \pm 8% (nH/N ²)	DCB (% min) @ 200 Oe	Coreloss (mW/cm ² , max) @ 50kHz, 1000G
High Flux	26	22.00	69.0	350

OD : 234

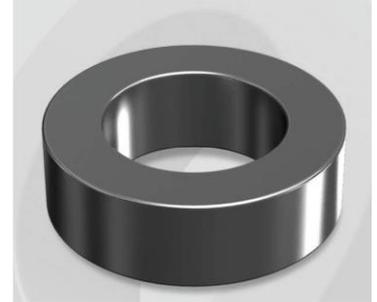

Core Dimensions

Dimensions		Uncoated		Coated		Color	Packaging
		(mm)	(inch)	(mm)	(inch)		
OD	(Max)	23.57	0.928	24.30	0.957	Black	Box Qty = 850 pcs
ID	(min)	14.40	0.567	13.77	0.542		
HT	(max)	8.89	0.350	9.70	0.382		

Physical Characteristics

Cross Section (A)	Path Length (l)	Window Area (Wa)	Volume (V)	Breakdown Voltage (Vac)
0.388 cm ²	5.88 cm	1.49 cm ²	2.2814 cm ³	1,000
0.0601 in ²	2.31 in	294,060 cmil	0.13921 in ³	

Winding Information

0% Winding length/turn (cm)		
2.993		
40% winding factor Surface Area (cm ²)		
26.78		
40% Wound Di.(mm)		
OD	ID	HT
27.76	9.02	13.81

Typical DC Bias Performance

